


TRIPHENYLANTIMONY (Triphenylstibine)

PRODUCT INFORMATION

DESCRIPTION

Arkema Inc. Triphenylantimony [CAS 603-36-1] is a free flowing, off-white to tan crystalline solid with the following properties:

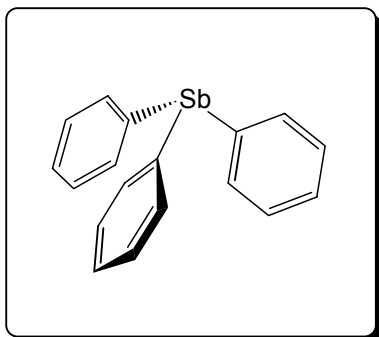

TYPICAL PROPERTIES

Formula	C ₁₈ H ₁₅ Sb
Molecular Weight	353.1
Melting Point (°C)	50
Boiling Point (°C @ 760 mm hg)	360
Density (g/mL)	1.5
Bulk Density (lbs/ft ³)	44
Solubility	Insoluble in water. Slightly soluble in ethyl alcohol. Soluble in benzene, toluene, petroleum, ethyl ether and chloroform.

PRODUCT FEATURES

Triphenylantimony has excellent shelf stability and is an excellent antioxidant at high temperatures.

RECOMMENDED USES

Please see Applications table.

PACKAGING

Triphenylantimony is available in 50 lb pails and 200 lb drums.

Arkema Inc.

2000 Market Street
Philadelphia, PA 19103-3222
(800) 331-7654
Fax: (215) 419 7064

Arkema

Additives Division
4-8 Cours Michelet – La Defense 10
F-92091 Paris la Defense Cex
Phone: (33) 01 49 00 80 80
Fax: (33) 01 49 00 88 40

Arkema Pte Ltd

10 Science Park Road #01-01A
The Alpha Singapore Science Park II
Singapore 117684
Phone: +65 6419 9199
Fax: +65 6419 9188

Email: info.additives@arkema.com



APPLICATIONS

General Area	Reaction / Application	Remarks
Catalysis	Polymerization	Low pressure, UV-induced, and Ziegler-Natta polymerization of ethylene, propylene, norbornene and other olefins. Polymerization of bisglycol esters, epoxides and formaldehyde.
	Dimerization and Oligomerization	Reactions of propylene and acrylonitrile. Butadiene-acrylic acid and isoprene-methyl acrylate co-monomer systems.
	Oxo	Ligand for transition metal catalyzed hydroformylation of olefins Acetaldehyde from methanol and synthesis gas.
	Reduction	Selective hydrogenation of olefins and acetylenes. Reduction of aromatic nitro compounds.
	Other	Disproportionation and hydrosilylation of olefins. Allylic rearrangement reactions.
Additives	Antioxidant	Inhibit oxidation of aldehydes and olefins.
	Corrosion Inhibitor	Prevent corrosion of steel in mild acid solution.
	Flame Retardant	For polyester, epoxy, polyimide, polyether and polyolefin resins.
	Gasoline/Oil	Gasoline antiknock agent. Additives for lubricants and hydraulic fluids.
Photography	Antifog	Fog inhibitor and image stabilizer in photosensitive films and copying materials.
Biocidal	Pesticide	Fungicide, bactericide and termite repellent.

NOTE: Please consult MSDS for updated and detailed safety and health information.

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, Arkema Inc. expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN. The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.

See MSDS for Health & Safety Considerations
© August 2006 Arkema Inc. All rights reserved.



Arkema Inc
2000 Market Street
Philadelphia, PA 19103
215-419-7000
www.arkema.com